

Features of LiFePO4 Battery


- **Longer Cycle Life:** Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.
- **Lighter Weight:** About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.
- **Higher Power:** Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.
- **Wider Temperature Range:** -20°C~60°C.
- **Superior Safety:** Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.
- **Increased Flexibility:** Modular design enables deployment of up to two batteries in series and up to ten batteries in parallel.
- **3 Years Warranty**



Application

- Electric vehicles, electric mobility
- Solar/wind energy storage system
- UPS, backup power
- Telecommunication
- Medical equipment
- Lighting

Cycle Life Curve

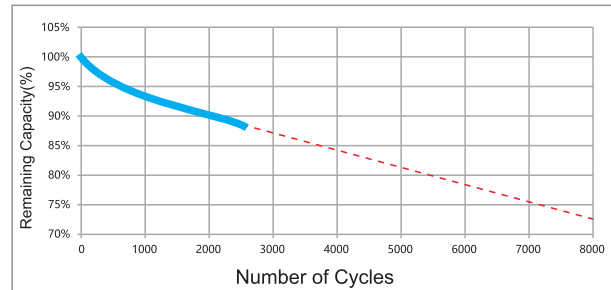


Specification


Electrical Characteristics	Nominal Voltage	25.6V
	Nominal Capacity	100Ah (C ₅ ,25°C)
	Energy	2560Wh
	Internal Resistance	≤200mΩ
	Cycle Life	>6000 cycles @0.2C
	Months Self Discharge	<3%
	Efficiency of Charge	100% @0.2C
	Efficiency of Discharge	96~99% @1C
Standard Charge	Charge Voltage	29.2±0.2V
	Charge Mode	0.2C to 29.2V, then 29.2,charge current 0.02C(CC/CV)
	Charger Current	20A
	Max. Charge Current	100A
	Charge Cut-off Voltage	29.6V±0.2V
Standard Discharge	Continuous Current	100A
	Max. Pulse Current	100A(<12s)
	Discharge Cut-off Voltage	21V
Environmental	Charge Temperature	0 °C to 45 °C (32F to 113F) @60±25% Relative Humidity
	Discharge Temperature	-20 °C to 60 °C (-4F to 140F) @60±25% Relative Humidity
	Storage Temperature	0 °C to 40 °C (32F to 104F) @60±25% Relative Humidity
	Water Dust Resistance	
Mechanical	Cell & Method	10213245-3.2V100AH-8S1P
	Plastic Case	2U standard case
	Dimensions (in./mm.)	482*410*133 mm
	Weight (lbs./kg.)	21.8Kg
	Terminal	100A Connector
	Protocol (optional)	RS485/CAN
	BMS	8S100A

Model Performance Diagrams


Number of Cycles Vs. DOD

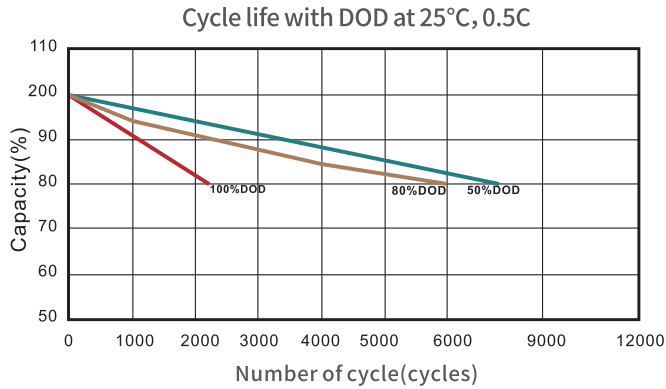


Discharge Performance at R.T.

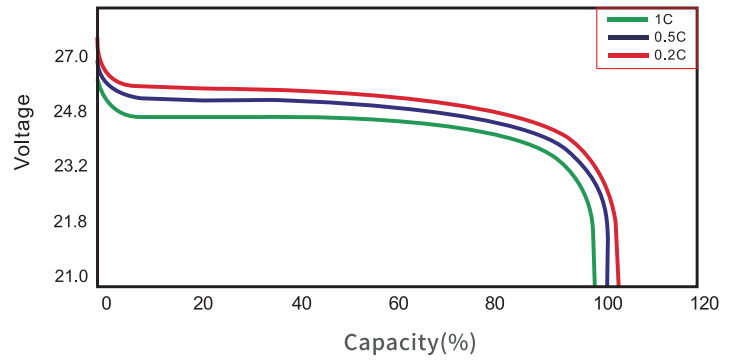


Battery Capacity (C) VS. Open Circuit Voltage (OCV)

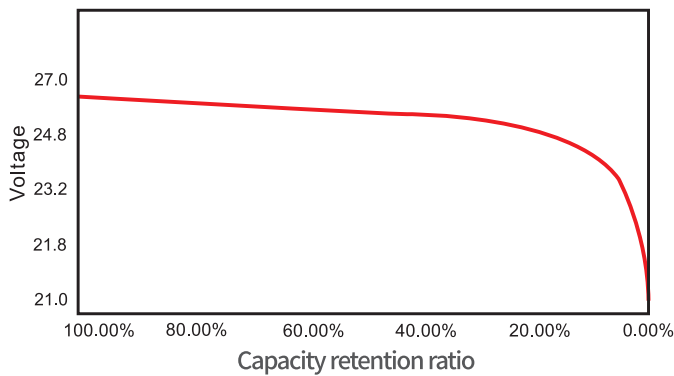

Battery Capacity Vs. Charging Time

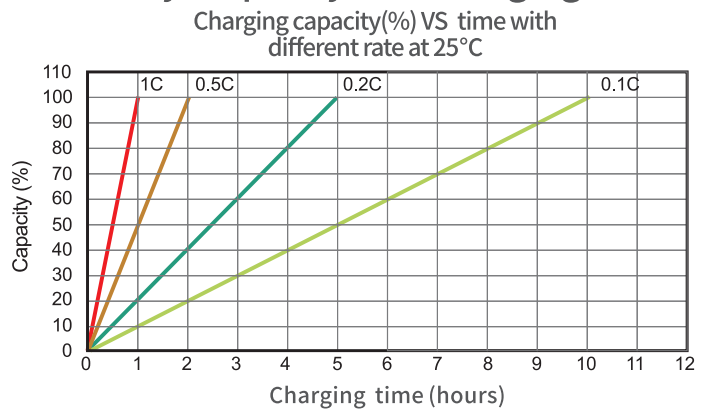

Cycle Life in Relation to Temperature

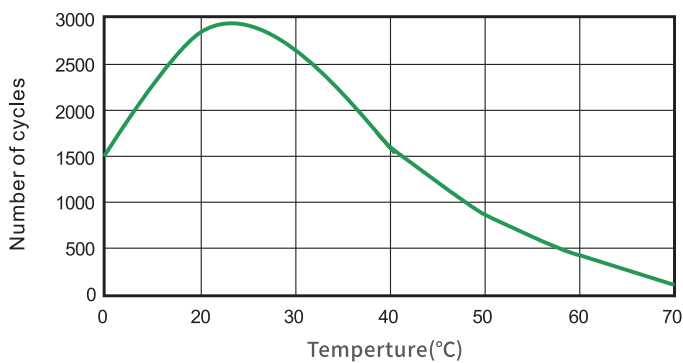

Temperature Effects on Capacity

